

UTILITY PATENT  
APPLICATION TRANSMITTAL

(Only for new nonprovisional applications  
under 37 CFR 1.53(b))

Attorney Docket No.

001444

Total Pages

First Named Inventor or Application Identifier

Kazuo ITO and Yasuo NOZAKI

Express Mail Label No.

Check Box, if applicable ☐ Duplicate

APPLICATION ELEMENTS FOR:  
DIGITAL CAMERA

ADDRESS TO: Director of Patents and Trademarks  
BOX PATENT APPLICATIONS  
Washington, D.C. 20231

1. ☒ Fee Transmittal Form (Incorporated within this form)  
(Submit an original and a duplicate for fee processing)

2. ☒ Specification Total Pages [27]

3. ☒ Drawing(s) (35 USC 113) Total Sheets [12]

4. ☒ Oath or Declaration Total Pages [2]

a. ☒ Newly executed (original)

b. ☐ Copy from prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 17 completed).

i. ☐ Deletion of Inventor(s)

Signed statement attached deleting inventor(s) named in prior application,  
see 37 CFR 1.63(d)(2) and 1.33(b).

5. ☒ Incorporation by reference (useable if box 4b is checked)

The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under  
Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)

7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)

a. ☐ Computer Readable Copy

b. ☒ Paper Copy (identical to computer copy)

c. ☐ Statement Verifying identity of above copies

**ACCOMPANYING APPLICATION PARTS**

8. ☒ Assignment Papers (cover sheet and document(s))

9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☒ Power of Attorney

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications  
under 37 CFR 1.53(b))

Attorney Docket No. **001444**

First Named Inventor or Application Identifier

**Kazuo ITO and Yasuo NOZAKI**

PAGE 2 OF 3

10. ☐ English translation Document (if applicable)

11. ☐ Information Disclosure Statement ☐ Copies of IDS Citations

12. ☐ Preliminary Amendment

13. ☒ Return Receipt Postcard (MPEP 503)

14. ☐ Small Entity Status is claimed.

15. ☒ Claim for Convention Priority ☒ [2] Certified copies of Priority Documents

a. Priority of \_\_\_\_\_ application no. \_\_\_\_\_ filed on \_\_\_\_\_ is claimed under 35 USC 119.

The certified copies/copy have/has been filed in prior application Serial No. \_\_\_\_\_.

(For Continuing Applications, if applicable)

16. ☐ Other \_\_\_\_\_

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Division ☐ Continuation-in-part (CIP) of prior application no. \_\_\_\_/\_\_\_\_

FEE TRANSMITTAL	Number Filed	Number Extra	Rate	Basic Fee
The filing fee is calculated below				\$710.00
Total Claims	11 - 20		x \$18.00	
Independent Claims	3 - 3		x \$80.00	
Multiple Dependent Claims			\$270.00	
Basic Filing Fee				710.00
Reduction by 1/2 for small entity				
Fee for recording enclosed Assignment			\$40.00	40.00
TOTAL				\$750.00

UTILITY PATENT  
APPLICATION TRANSMITTAL

(Only for new nonprovisional applications  
under 37 CFR 1.53(b))

Attorney Docket No.

001444

First Named Inventor or Application Identifier

Kazuo ITO and Yasuo NOZAKI

PAGE 3 OF 3

☒ [XX] A check in the amount of \$750.00 is enclosed to cover the filing fee of \$710.00 and the assignment recordation fee of \$40.00.

☐ [ ] Please charge our Deposit Account No. 01-2340 in the total amount of \_\_\_\_\_ to cover the filing fee and the \_\_\_\_\_ assignment recordation fee. A duplicate of this sheet is attached.

☒ [XX] The Commissioner is hereby authorized to charge payment for any additional filing fees required under 37 CFR 1.16 or credit any overpayment to Deposit Account No. 01-2340. A duplicate of this sheet is attached.

8. CORRESPONDENCE ADDRESS


ARMSTRONG, WESTERMAN, HATTORI  
McLELAND & NAUGHTON  
1725 K Street, N.W. Suite 1000  
Washington, D.C. 20006  
Telephone: (202) 659-2930  
Facsimile: (202) 887-0357

SUBMITTED BY

Typed or Printed Name Mel R. Quintos

Reg. No. 31,898

Signature



Date: October 26, 2000

MRQ/yap

## TITLE OF THE INVENTION

Digital Camera

## BACKGROUND OF THE INVENTION

### 5 Field of the invention

This invention relates to a digital camera for storing and accumulating taken-image data into a high-capacity server remotely located through the Internet so that desired image data can be, as required, downloaded from the server.

### Description of the prior art

10 In the digital camera, the subject image taken by an imager device, such as a CCD imager, is subjected to predetermined signal processing. This produces still image data to be recorded in a compressed state onto a removable recording medium. When a reproduce mode is set, still image data is reproduced from the recording medium and outputted onto a LCD monitor through the decompression process. For such digital  
15 cameras, various recording mediums are used, including memory cards incorporating a flash memory having a capacity of approximately several tens of M bytes, floppy disks, small-sized hard disks, magneto-optical disks having a capacity of approximately several hundreds of M bytes, etc. These mediums are on rapid increase in their capacity. Today, they can store increased amount of image data as compared to that several years before.

20 However, the data size of one still picture has increased with recent increase of pixel count of the CCD-imager. Meanwhile, the speed increase of signal processing has enabled to take a motion image. As a result, the total data amount of an image to be recorded to the recording medium has also drastically increased. The user who is to take a picture is required to be conscious of if sufficient vacant capacity is available in the  
25 recording medium.

## SUMMARY OF THE INVENTION

Therefore, it is a primary object of the present invention to provide a digital camera capable of taking subjects without paying attentions to the memory capacity.

5           According to the present invention, a digital camera for recording to a recording medium an image file including a main-image signal and a size-reduced image signal of a subject taken comprises: a first transmitter for transmitting a plurality of the image files recorded in the recording medium to an external storage device; an eraser for erasing from the recording medium the plurality of image files transmitted by the first  
10           transmitter; a first receiver for receiving a plurality of the size-reduced image signals from the external storage device; a selector for selecting a desired size-reduced image signal from among the plurality of size-reduced image signals received by the first receiver; and a second receiver for receiving from the external storage device the image file including the desired size-reduced image signal selected by the selector.

15           An image file including a main-image signal and a size-reduced image signal of a subject taken is recorded to the recording medium. The image files recorded are transmitted to the external storage device by the first transmitter. The image files transmitted are erased from the recording medium by the eraser. A plurality of the size-reduced image signals are received from the external storage device by the first receiver.

20           If a desired size-reduced image signal is selected from among the plurality of size-reduced image signals received by the selector, the second receiver receives from the external storage device the image file including the desired size-reduce image signal selected.

25           Because the image files recorded in the recording medium are transmitted to the external storage medium, the operator is allowed to continue to take pictures without



size-reduce image signal of a subject taken. When a transmitter transmits to an external storage device the image file recorded in the recording medium, a storage stores in a nonvolatile memory area the size-reduced image signal included in this image file. Also, an eraser erases from the recording medium the image file transmitted.

5           Because the image files recorded in the recording medium is stored in the externally provided storage device in this manner, the operator can continue to take pictures without paying attention to the capacity of recording medium. Also, the transmitted image files are erased leaving size-reduced image signals, it is possible for the operator to omit the labor and time of manually erasing the image files. Further, the  
10          content of the image files stored in the external storage device can be easily confirmed by the size-reduced image signals.

          In one embodiment of the invention, an image file selector is further provided to select a desired image file from among a plurality of the image files recorded in the recording medium. In this case, the transmitter transmits the desired image file and the  
15          storage stores in the memory area the size-reduced image signal included in the desired image file. The eraser erases from the recording medium the desired image file.

          In another embodiment of the invention, when a reproducer for reproducing a plurality of the size-reduced image signals stored in the memory area, a displayer displays a plurality of size-reduced images based on the plurality of size-reduced image signals  
20          reproduced by the reproducer. When a size-reduced image selector selects a desired size-reduced image from among the plurality of size-reduced images displayed, a receiver receives from the external storage device the image file corresponding to the size-reduced image selected.

          In still another embodiment of the invention, an adder adds print-job information  
25          to the image file prior to transmitting the image file.

In yet another embodiment of the invention, the nonvolatile memory area is formed in the recording medium.

According to the invention, a digital camera for transmitting to an external storage device an image signal of a subject taken comprises: a detector for detecting a relationship in magnitude between a vacant capacity of the external storage device and a size of the image signal; a first transmitter for transmitting an extension request for the vacant capacity to the external storage device based on a result of detection by the detector; and a second transmitter for transmitting the image signal to the external storage device after the vacant space has been extended in response to the extension request.

The image signal of a subject taken by the digital camera is sent to the external storage device. The relationship in magnitude between the vacant capacity of the external storage medium and the to-be-transmitted image signal is detected by the detector. The first transmitter transmits a vacant-capacity extension request to the external storage device based on a result of detection by the detector. If the vacant capacity is extended in response to the extension request, the second transmitter transmits the image signal to the external storage device.

Because the vacant capacity of the external storage medium is extended based on a relationship in magnitude of the vacant capacity of the external storage medium and the to-be-transmitted image signal, the operator is allowed to continue to take pictures without conscious of the vacant capacity of the external storage device.

In one embodiment of the invention, a prompter prompts the vacant capacity to extend when the vacant capacity is lower than the size. Here, if an instructor instructs an extension of the vacant capacity, the first transmitter transmits the extension request in response to an instruction by the instructor.

Preferably, the capacity of the external storage device is on sale on a



predetermined-size basis and the instruction of the instructor is an instruction for purchasing a capacity of the predetermined size.

The above described objects and other objects, features, aspects and advantages of the present invention will become more apparent from the following detailed description of the present invention when taken in conjunction with the accompanying drawings.

### BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram showing one embodiment of the present invention;

Figure 2 is a flowchart showing one part of operation of the Figure 1 embodiment;

Figure 3 is a flowchart showing another part of operation of the Figure 1 embodiment;

Figure 4 is a flowchart showing still another part of operation of the Figure 1 embodiment;

Figure 5 is a flowchart showing yet another part of operation of the Figure 1 embodiment;

Figure 6 is a flowchart showing one part of operation of another embodiment of the invention;

Figure 7 is a flowchart showing another part of the other embodiment of the invention;

Figure 8 is a flowchart showing part of operation of still another embodiment of the invention;

Figure 9 is a flowchart showing another part of operation of the other embodiment of the invention;

Figure 10 is a flowchart one part of operation of still another embodiment of the invention;

Figure 11 is an illustrative view showing an example of a password input screen;

Figure 12 is an illustrative view showing one example of a mode select screen.

Figure 13 is an illustrative view showing one example of a purchase query screen;

Figure 14 is an illustrative view showing an example of an image-file storage

5 reject screen;

Figure 15 is an illustrative view showing an example of a group select screen; and

Figure 16 is an illustrative view showing an example of a print-job information  
input screen.

## 10 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to Figure 1, a digital camera of this embodiment includes a system  
controller 38. The system controller 38 is to be selected in a still-picture taking mode by  
a taking-mode select switch 42 and, at operating a release button 40, supplies a  
corresponding key state signal to a CPU 32. Thereupon, the CPU 32 starts up a picture-  
15 taking system including a CCD imager 10, a CDS/AGC circuit 12, an A/D converter 14, a  
signal processing circuit 16 and a thumbnail creator circuit 18.

The CCD imager 10 performs photoelectric conversion on a subject optical image  
given through a lens (not shown) to produce image signals (electric charges) and outputs  
the produced image signals by the raster-scan scheme. The output image signal is  
20 removed of noise and adjusted in level by the CDS/AGC circuit 12 and converted into  
image data (digital signal) by the A/D converter 14. The signal processing circuit 16  
performs signal processing, such as color separation and YUV conversion, on the image  
data and creates image data (main-image data) comprising luminance data and two kinds  
of color-difference data. The produced main-image data is delivered to a memory control  
25 circuit 22 via a bus 20 and stored in a main-image storage area 24a of an SDRAM 24 by

the memory control circuit 22.

The main-image data produced by the signal processing circuit 16 is also supplied to the thumbnail creator circuit 18. The thumbnail creator circuit 18 performs thinning-out on the supplied main-image data to produce thumbnail image data and sends the  
5 created thumbnail image data to the memory control circuit 22 through the bus 20. The thumbnail image data is then stored to a thumbnail image storage area 24b by the memory control circuit 22.

The CPU 32 disables the picture-taking system at a time that the thumbnail image data has been stored in the SDRAM 24, and in turn supplies a main-image compressing  
10 command and thumbnail compressing command to the image compression/decompression circuit 30. A main-image compressing command is first outputted. The image compression/decompression circuit 30 reads out main-image data stored in the main-image storage area 24a through the memory control circuit 22 and conducts image compression conforming to the JPEG format. The compressed main-  
15 image data produced by the compression process is stored to a compressed main-image storage area 24c of the SDRAM 24 through the memory control circuit 22. Subsequently, when a thumbnail compressing command is outputted, the image compression/decompression circuit 30 reads out the thumbnail image data stored in the compressed thumbnail image storage area 24d through the memory control circuit 22 and  
20 performs JPEG compression similarly to the above. This produces compressed thumbnail image data to be stored in a compressed-thumbnail-image storage area 24d of the SDRAM through the memory control circuit 22.

Obtaining the compressed main-image data and compressed thumbnail image data as above, the CPU 32 reads out these of compressed data through the memory control  
25 circuit 22 and records them as still image files to a memory card 34. Here, the

09695981-102600

compressed thumbnail image data serves as index information for the still picture files. Also, the still picture file at its header is given a file name, a picture taking date and an escape identifier representative of a JPEG file.

Incidentally, the memory card 34 is a nonvolatile recording medium to be  
5 removably loaded in the digital camera, which in actual is connected to the bus 20 through an interface.

Meanwhile, in a state that a motion-picture taking mode is selected by the taking-mode select switch 42, when the release button 40 is pressed, the CPU 32 continues starting up the picture-taking system over a time the release button 40 is being  
10 pressed and repeatedly supplies main-image compressing commands at an interval of 1/15th of a second to the image compression/decompression circuit 30. The CCD imager 10 outputs frames of image signals, for example, at an interval of 1/15th of a second, and the main-image data stored in the main-image storage area 24a is updated at an interval of 1/15th of a second. It should be however noted that, because the thumbnail creator circuit  
15 18 is disabled at a time that a first frame of thumbnail image data has been produced, the first frame of thumbnail image data stored in the thumbnail image storage area 24b will not be updated by the following thumbnail image data.

The image compression/decompression circuit 30 compresses the main-image data in response to a compressing command, in a manner similarly to the above. The  
20 main-image data stored in the main-image storage area 24a is sequentially subjected to compression processing. The frames of compressed main-image data are successively accumulated to the compressed main-image storage area 24c of the SDRAM 24. When the release button is released from depression, the CPU 32 sends a thumbnail image compressing command to the image compression/decompression circuit 30. Thereupon,  
25 the image compression/decompression circuit 30 compresses the thumbnail image data in

000201.102600

a manner similar to the above, and stores the compressed thumbnail image data to the compressed thumbnail image storage area 24d.

After obtaining a plurality of frames of compressed main-image data and one frame of compressed thumbnail image data, the CPU 32 records these of compressed data as motion-picture files (motion JPEG files) to the memory card 34. The compressed thumbnail image data, even if in a motion image file form, serves as index information. Also, to the header of the motion image file is given a file name, a picture-taking date and an escape identifier (MOV) representative of a motion image file.

By the repetition of taking still or motion images as above, still or motion image files are accumulated up within the memory card 34 and the vacant capacity is correspondingly decreased in the memory card 34. In order for restoration from the vacant capacity inside the memory card 34, the operator may operate a file-transmit key 46. This causes a communication circuit 36 having a data-communication function as that of a portable communication terminal to make dialing to an Internet service provider 50. When a connection is once established, a URL of a data base server (external memory device) 52 is transmitted over the Internet thereby getting an access to the server 52 through the provider 50. Once the access to the server 52 becomes available, the still or motion image files accumulated on the memory card 34 can be sent to the server 52 by operator's predetermined key operation. A 10 G-bytes user area is secured on the data base server 52 on the basis of a contract with the operator. The sent still or motion image file is received in the user area. After all the image files has been transferred from the memory card 34, the CPU 32 erases all the accumulated image files from the memory card 34. This restores the vacant capacity inside the memory card 34.

Incidentally, in the case that the vacant capacity of the user area is decreased, the operator can purchase an additional user area (30M bytes) by performing predetermined

key operation. Accordingly, after the initial 10 G-bytes user area becomes full, the image files may be stored to an additional area.

On the other hand, when it is desired to download a particular image file (still or motion image file) stored in the data base server 52 to the digital camera, the operator  
5 may operate a file download key 48. Thereupon, the communication circuit 36 makes dialing to the provider 50 and gets an access to the server 52. After establishing a connection to the server 52, if the operator designates a desired date, an image file created on that designated date is detected on the server 52 side. Thus, downloaded is the compressed thumbnail image data included in the detected image file. The downloaded  
10 compressed thumbnail image data is stored to the compressed thumbnail image storage area 24d through the memory control circuit 22.

Completing the download, the CPU 32 supplies a thumbnail image decompressing command to the image compression/decompression circuit 30. The image  
compression/decompression circuit 30 reads out the compressed thumbnail image data  
15 through the memory control circuit 22 and performs JPEG decompression on it. The decompressed thumbnail image data is stored to the main-image storage area 24a through the memory control circuit 22. That is, the main-image storage area 24a, when displaying an image on a LCD monitor 28, serves as a VRAM. The decompressed thumbnail image data is stored not to the thumbnail image area 24b but to the main-image storage area 24a.  
20 An NTSC encoder 26 reads the image data out of the main-image storage area 24a through the memory control circuit 22 and converts the read-out image data into an NTSC-formatted composite image signal. The converted composite image signal is supplied to the incorporated LCD monitor 28. As a result, a thumbnail image is displayed on the LCD monitor 28.

Incidentally, when compressed thumbnail image data is extracted from a plurality

of image files and downloaded, a plurality of screens of thumbnail image data are stored in the main-image storage area 24a so that a plurality of thumbnail images area multi-displayed on the LCD monitor 28.

5 In a state that thumbnail images are multi-displayed, when the operator selects a desired thumbnail image by the ten key 44, selection information is transmitted to the server 52. Thereupon, the server 52 specifies an image file corresponding to the sent selection information and transmits the specified image file. The CPU 32 downloads the image file transmitted from the server 52 through the communication circuit 36 and records it onto the memory card 34. Also, the compressed main-image data contained in  
10 the downloaded image file is stored to the compressed main-image storage area 24c through the memory control circuit 22, and a main-image decompressing command is sent to the image compression/decompression circuit 30. The compressed main-image data stored in the compressed main-image storage area 24c is decompressed by the image compression/decompression circuit 30. The decompressed main-image data is stored in  
15 the main-image storage area 24a. Due to this the thumbnail image data stored in the main-image storage area 24a is overwritten by the decompressed main-image data. The NTSC encoder 26 performs encode processing on the image data stored in the main-image storage area 24a similarly to the above and supplies an encoded composite image signal to the LCD monitor 28. As a result, the thumbnail images multi-displayed are  
20 updated by a main image corresponding to a thumbnail image selected by the operator.

Incidentally, when a motion image file is downloaded, a plurality of frames of compressed main-image data area transferred from the memory card 34 to the compressed main-image storage area 24c and compressed main-image data of each frame is decompressed at an interval of 1/15th of a second. As a result, a motion picture  
25 comprising a plurality of frames of decompressed main images is displayed on the

monitor 28.

The CPU 32 concretely processes a flowchart shown in Figure 2 to Figure 5 when it sends an image file to the server 52 or downloads an image file from the server 52. Here, Figure 2 shows a button-input task and Figure 3 an image-transmitting/receiving task. Also, Figure 4 and Figure 5 show respective subroutines of transmission and download processes.

Referring first to Figure 2, if an operator operates any of the release button 40, the taking-mode select switch 42, the ten key 44, the file-transmit key 46 and a file download key 48, the process restores from a sleep state in step S1 to determine in step S3 whether any button was operated or not. If an operated button herein is the file-transmit key 46 or the file download key 48, the process proceeds from the step S3 to step S5 to generate a transmission/reception task startup signal. On the other hand, if the operated button is the release button 40, the taking-mode select switch 42 or the ten key 44, the process proceeds from the step S3 to S7 to perform another process. After completing the process of the step S5 or step S7, the CPU 32 returns to the step S1.

When a transmission/reception task startup signal is generated in the step S5, the CPU 32 restores an image transmission/reception task shown in Figure 3 from a sleep state of step S21. Then, in step S23 the picture-taking system is disabled and, in step S25, connection is made to the provider 50. That is, the communication circuit 36 is controlled to make dialing to the provider 50 to establish connection to the provider 50. After establishing a connection state, in step S27 an URL of the server 52 is transmitted to the provider 50 thereby making an access to the server 52.

When communication is made possible to and from the server, the server 52 transmits a password screen of image data. In step S29, this password screen of image data is downloaded from the server 52 and the downloaded image data is written to the



main-image storage area 24a of the SDRAM 24 through the memory control circuit 22. This image data is read out by the NTSC encoder 26 through the memory control circuit 22 and converted into a composite image signal. As a result, a download screen shown in Figure 11 is displayed on the LCD monitor 28.

5           In step S31, it is determined whether the operator input a password or not. If "YES", the input password is transmitted, in step S31, to the server 52. The server 52, when the password is correct, transmits a mode select screen of image data. In step S33, the image data transmitted from the server 52 is downloaded and processed similarly to the step S27. As a result, a mode select screen shown in Figure 12 is displayed on the  
10       LCD monitor 28.

          Responsive to the mode select screen, when the operator selects a transmission mode by the ten key 44, the CPU 32 in step S37 determines "YES" and, in step S39, executes a transmission process. On the other hand, when the user selects a download mode by the ten key 44, the CPU 32 in step S41 determines "YES" and executes a  
15       download process in step S43. When the process of the step S39 or S43 is completed, then in step S45 the connection to the provider 50 is cancelled and the process returns to the step S21.

          In step S39, the CPU 32 processes a subroutine shown in Figure 4. First, calculated in step S51 a total data amount of a transmission image file (all the image files  
20       recorded in the memory card 34). Next, in step S53 a request is made to the server 52 to transmit vacant capacity information about the user area, and in step S55 vacant capacity information is downloaded from the server 52. In step S57, comparison is made between a total data amount and a vacant capacity. If the total data amount is greater than the vacant capacity, in step S59 information of capacity insufficiency is sent to the server 52.  
25       The server 52 transmits a purchase query screen of image data in response to the

capacity-insufficiency information. Consequently, in step S61 the purchase query screen of image data is downloaded to execute the same process as that of the step S27. As a result, a purchase query screen shown in Figure 13 is displayed on the LCD monitor 28.

Responsive to the purchase query screen, if the operator select "YES" by the ten  
5 key 44, the CPU 32 advances from step S63 to step S67 to perform a process of purchasing an additional area (30M bytes). This provides an extension of 30 Mbytes to the user area. After completing the purchase process, process returns to the step S53. On the other hand, if the operator selects "NO" by the ten key 44, the CPU 32 advances from the step S63 to step S65 to display a storage-impossible screen as shown in Figure 14 on  
10 the LCD monitor 28. Thereafter, in step S73 the connection to the server 52 is cancelled and then the process returns to the image transmission/reception task shown in Figure 3.

On the other hand, if it is determined in step S55 that the total data amount is greater than the vacant capacity, the process advances to step S69 to transmit all the image files recorded on the memory card 34 to the server 52. Specifically, all the image  
15 files are first stored to the compressed main-image storage area 24b and thereafter transferred to the server 52 through the communication circuit 36. After completing the transfer process, all the image files are deleted from the memory card 34 in step S71. After deleting all the image files, the process returns to the image transmission/reception task shown in Figure 3 through a disconnection process from the server 52 of step S73.

20 In the step S43 shown in Figure 3, the CPU 32 executes a download process shown in Figure 5. At first, in step S81, a group select screen shown in Figure 15 is displayed on the LCD monitor 28 and then, in step S83, a creation date of a desired image file is waited to input. If the operator inputs a desired date by the ten key 44, date data is transmitted in step S85 to the server 52. The server 52 extracts an image file corresponding to the  
25 transmitted date data from the user area and takes compressed thumbnail image data out

of the extracted image file. Then, the compressed thumbnail image data thus taken out is transmitted.

In step S87, the compressed thumbnail image data transmitted from the server 52 is downloaded to the compressed thumbnail image storage area 24d of the SDRAM 24.

5 The image compression/decompression circuit 30 is instructed to make a decompression process on the compressed thumbnail image data. The compressed thumbnail image data is read out through the memory control circuit 22 and decompressed by the image compression/decompression circuit 30. The decompressed thumbnail image data is stored to the main-image storage area 24a and thereafter delivered to the NTSC encoder 10 26 through the memory control circuit 22. The NTSC encoder 26 converts the received thumbnail image data into a composite image signal. As a result, a plurality of thumbnail pictures are multi-displayed on the LCD monitor 28.

In step S89, it is determined whether a desired thumbnail image has been selected by the ten key or not. If "YES", in step S91 selection information is transmitted to the server 52. The server 52 specifies a desired image file from the user area based on the 15 transmitted selection information, and transmits the specified image file. In step S93, the image file transmitted from the server 52 is downloaded and, in the following step S95, the downloaded image file is recorded onto the memory card 34. In step S97, the compressed main-image data contained in the downloaded image file is reproduced.

20 Specifically, the compressed main-image data is stored to the compressed main-image storage area 24c through the memory control circuit 22 and a main-image decompressing command is given to the image compression/decompression circuit 30. The image compression/decompression circuit 30 reads out the compressed main-image data stored in the compressed main-image storage area 24c through the memory control 25 circuit 22 and performs JPEG decompression on the read-out compressed main-image

data. The decompressed main-image data is stored to the main-image storage area 24a through the memory control circuit 22 and thereafter converted into a composite image signal by the NTSC encoder 26. As a result, a main picture same as the selected thumbnail image is displayed on the entire screen of the LCD monitor 28. In the case that  
5 the downloaded image file is a motion image file, a plurality of frames of compressed main-image data are stored to the compressed main-image storage area 24c and frames of compressed main-image data are sequentially decompressed at an interval of 1/15th of a second. As a result, a motion picture comprising a plurality of decompressed main images is displayed on the monitor 28. After completing the process of step S97, the  
10 process returns to the image transmission/reception task shown in Figure 3.

According to this embodiment, if a transmission mode is selected, all the image files accumulated in the memory card 34 are saved to the server 52 located at a remote site and the image files in the memory card 34 are deleted. Accordingly, the operator is allowed to continue to take pictures without paying attention to the vacant capacity of the  
15 memory card 34. Also, where the vacant capacity of the server 52 decreases lower than the size of the image file, the user area can be extended by conducting a purchase procedure. Thus, the operator can continue to take pictures without paying attention to the user-area vacant capacity. Furthermore, because the image files saved in the server 52 is to be downloaded by selecting a download mode, it is possible to easily view a picture  
20 content by the built-in LCD monitor 28.

A digital camera of another embodiment is similar to the Figure 1 embodiment except in that the subroutines of Figure 6 and Figure 7 are to be processed respectively in steps S39 and S43 of Figure 3. Hence, duplicated explanations will be omitted.

Referring first to Figure 6, in steps S91 to S117, similar process is made to that of  
25 the steps S51 to S67 of Figure 4 and, in steps S121, S123 and S127, similar process is

made to that of the steps S69 to S73 of Figure 4. The difference from the process of Figure 4 lies in that the processes of the steps S119 and S125 are added. In step S119, compressed thumbnail image data is extracted from each image file to be transmitted to the server 52. The extracted compressed thumbnail image data is stored to the  
5 compressed thumbnail image storage area 24d through the memory control circuit 22. In step S125, the compressed thumbnail image data stored in the compressed thumbnail image storage area 24d is read out through the memory control circuit 22 and recorded to a predetermined area of the memory card 34. That is, prior to transferring the image files accumulated in the memory card 34 to the server 52, the compressed thumbnail image  
10 data contained in the image files is read out and stored to the SDRAM 24. The read-out compressed thumbnail image data is returned to the memory card 34 after all the image files have been transferred. Because the memory card 34 is nonvolatile, the compressed thumbnail image data will not disappear even if the power is put off.

Referring subsequently to Figure 7, in steps S133 to S141, a similar process to that  
15 of the steps S89 to S97 of Figure 5 is carried out. The difference from the process of Figure 5 lies in that the compressed thumbnail image data stored in the memory card 34 in the step S131 is reproduced and multi-displayed on the LCD monitor 28. In this embodiment, after the image files have been transferred to the server 52, the compressed thumbnail image data only is left in the memory card 34. Consequently, the compressed  
20 thumbnail image data in the memory card 34 is reproduced without downloading the compressed thumbnail image data as is made in Figure 5.

According to this embodiment, because of no necessity of downloading the compressed thumbnail image data, it is possible to confirm simply and swiftly as to what image file is being saved in the server 52.

25 A digital camera of still another embodiment is similar to the above other

embodiment except in that a subroutine of Figure 1 and Figure 9 is to be processed in step S39 of Figure 3. Hence, duplicated explanations will be omitted as large as possible.

Referring to Figure 8, the CPU 32 first, in step S151, reproduces the compressed thumbnail image data contained in the image files accumulated in the memory card 34  
5 and multi-displays a plurality of thumbnail pictures on the LCD monitor 28. Subsequently, it is determined in step S153 whether the file-transmit key 46 was pressed or not. It is determined in step S155 whether or not any of the thumbnail images was selected by the ten key 44. If a thumbnail image is selected by the ten key 44, the process advances to step S157 to store an image file corresponding to the selected thumbnail  
10 image as a transmission image file to the compressed main-image storage area 24c. On the other hand, if the file-transmit key 46 is pressed, the process proceeds to step S159 to determine whether one or more transmission image files exist or not. If no transmission image file exists, the process returns to the step S153. However, if one or more transmission image files exist, the process of step S161 and the subsequent are executed.  
15 Incidentally, in steps S161 to S177, a similar process to that of steps S101 to S117 of Figure 6 is to be made, hence duplicated explanation being omitted.

If it is determined in step S167 that the total data amount is equal to or smaller than the vacant capacity, the process proceeds to step S179 to extract compressed thumbnail image data from the transmitting image files stored in the compressed main-image  
20 storage area 24c. The extracted compressed thumbnail image data is stored in the compressed thumbnail image storage area 24d. After completing the process of the step S179, in step S181 the to-be-transmitted image file within the compressed main-image storage area 24c is transmitted to the server 52 and, in step S183, the image files already transmitted are deleted from the memory card 34. Thereafter, in step S185, the  
25 compressed thumbnail image data stored in the compressed thumbnail image storage area

24d is recorded to the predetermined area of the memory card 34. After ending the process of the step S185, in step S187 the connection is cancelled from the server 52, and then the process returns to the image transmission/reception task of Figure 3.

According to this embodiment, only the image files selected by the operator are sent to the server 52 and the compressed thumbnail image data relating to the transmitted image files is left in the memory card 34. Consequently, the operator is allowed to arbitrary select an image file desired saved in the server 52. Furthermore, the operator can easily, swiftly confirm from the on-hand compressed thumbnail image data as to what image files are currently saved in the server 52.

In a digital camera of yet another embodiment, a subroutine shown in Figure 10 is processed in the process of step S7 of Figure 2. The CPU 32 first, in step S181, reproduces the compressed thumbnail image data contained in the image files stored in the memory card 34 and multi-displays a plurality of thumbnail images on the LCD monitor 28. If the operator herein selects any thumbnail image by the ten key 44, the CPU in step S183 determines "YES" and, in step S185, displays on the LCD monitor 28 a print-job screen shown in Figure 16. In response, if the operator inputs a desired number and size of prints, the CPU advances from step S187 to step S189 to add print-job information comprising a number and size to the image file corresponding to the selected thumbnail image. After ending the process of step S189, the process returns to the button-input task of Figure 2.

This embodiment is effective for the case where the server 52 side can afford to provide print service of image files. That is, if desired print-job information is added before transmission to the image file through the above process and then the image file is transmitted to the server 52, it is possible to positively, swiftly send a required size and number of sheets to the server 52.

Also, in any of the above embodiments, because the image files are under management in the Internet server 52, a plurality of persons if know a password can freely save or download an image file by utilization of their digital cameras. That is, the image files in the server 52 can be shared by a plurality of persons.

Incidentally, in the embodiments, although the communication circuit incorporates therein the function of a portable communication terminal, the communication interface only may be connected to the bus while communication with the provider be made through a separately prepared portable communication terminal. In this case, it can be considered for a method to connect between the digital camera and the portable communication terminal via a communication-cable wire or a near-distance wireless scheme such as of the Bluetooth technology.

Furthermore, although the above embodiments erased the image files immediately after transmission, the following countermeasure is to be considered in order to prevent the image files from disappearing due to transmission errors. Where the to-be-transmitted image file is an extremely important file, after the image file has been stored to the server the same image file is sent back from the server so that it is collated with an already-transmitted image file in the memory card. If their data contents agree, no communication error occurred is to be assumed and hence the already-transmitted image file is erased. If there is disagreement, the already-transmitted image file is again transmitted to the server.

Also, although the above embodiments exemplified the memory card as a recording medium on the camera side, the recording medium may be of every medium, including built-in flash memories and removable magneto-optical disks. Also, the image data in the image file may be non-compressive. Furthermore, the motion-image compression method may use, in place of the MOTIONJPEG, MPEG without problems.



The user area on the server side is not limited to 10G bytes but may have higher capacity.

Furthermore, in the above embodiments, it is on the digital-camera side that obtains user-area vacant capacity information and compares a data amount of a to-be-transmitted image file with the vacant capacity information. In the invention, however, a  
5 data amount of a to-be-transmitted image file may be transmitted to and compared on the database server side so that a comparison result can be received from the database server to detect a relationship in magnitude between the vacant capacity and the data amount.

Furthermore, in the above other and still other embodiments, compressed thumbnail image data is taken out prior to transmission of an image file and the image file  
10 is erased from the memory card after transmitting the image file. The compressed thumbnail image data taken out of the image file can be stored to the memory card. However, the storage of the compressed thumbnail image data is not necessarily into the memory card. That is, a non-removable flash memory may be provided in the digital camera so that the compressed thumbnail image data taken out of the image file can be  
15 stored in the flash memory.

Also, an Internet communication function can be provided to the digital camera so that contraction can be made with a particular server prepared with image files having various-site geographical data. If accessing the server to input an address, it is possible to download an image file of a site of interest to the camera and display it on the LCD  
20 monitor. Even where outing without carrying a map and missing a way, a destination can be easily find out by accessing the map server.

Furthermore, where preparing communication-functioned digital cameras and one camera is carried to the outside while the other placed set in front of a safe in the home, dial-connection can be made as required using the carried digital camera to the in-home  
25 digital camera. The in-home digital camera is made take a still picture by remote control

so that a taken image file is gotten through the server to confirm the image file with using the carried camera. This makes it possible to monitor whether a suspicious person is sneaking into the home or not.

Although the present invention has been described and illustrated in detail, it is  
5 clearly understood that the same is by way of illustration and example only and is not to be taken by way of limitation, the spirit and scope of the present invention being limited only by the terms of the appended claims.

09535901.102500

**WHAT IS CLAIMED IS:**

1. A digital camera for recording to a recording medium an image file including a main-image signal and a size-reduced image signal of a subject taken, comprising:
- 5 a first transmitter for transmitting a plurality of the image files recorded in said recording medium to an external storage device;
  - an eraser for erasing from said recording medium the plurality of image files transmitted by said first transmitter;
  - a first receiver for receiving a plurality of the size-reduced image signals from said external storage device;
  - 10 a selector for selecting a desired size-reduced image signal from among the plurality of size-reduced image signals received by said first receiver; and
  - a second receiver for receiving from said external storage device the image file including the desired size-reduced image signal selected by said selector.
2. A digital camera according to claim 1, wherein said first receiver includes a date
- 15 inputter to input a desired date, a date information transmitter to transmit date information representative of the desired date to said external storage device, and a size-reduced image signal receiver to receive from said external storage device the plurality of size-reduced image signals generated on the desired date.
3. A digital camera according to claim 1, wherein said selector includes a displayer
- 20 to display a plurality of size-reduced images based on the plurality of size-reduced image signals received by said first receiver, and a size-reduced image selector to select a desired size-reduced image from among the plurality of size-reduced images displayed by said displayer.
4. A digital camera for recording to a recording medium an image file including a
- 25 main-image signal and a size-reduced image signal of a subject taken, comprising:

09695931-102600

a transmitter for transmitting to an external storage device the image file recorded in said recording medium;

a storage for storing in a nonvolatile memory area the size-reduced image signal included in the image file transmitted by said transmitter; and

5 an eraser for erasing from said recording medium the image file transmitted by said transmitter.

10 5. A digital camera according to claim 4, further comprising an image file selector to select a desired image file from among a plurality of the image files recorded in said recording medium; wherein said transmitter transmits the desired image file, said storage storing in said memory area the size-reduced image signal included in the desired image file, and said eraser erasing from said recording medium the desired image file.

6. A digital camera according to claim 4, further comprising:

a reproducer for reproducing a plurality of the size-reduced image signals stored in said memory area;

15 a displayer for displaying a plurality of size-reduced images based on the plurality of size-reduced image signals reproduced by said reproducer;

a size-reduced image selector for selecting a desired size-reduced image from among the plurality of size-reduced images displayed by said displayer; and

20 a receiver for receiving from said external storage device the image file corresponding to the size-reduced image selected by said size-reduced image selector.

7. A digital camera according to claim 4, further comprising an adder to add print-job information to said image file prior to transmitting the image file.

8. A digital camera according to claim 4, wherein said nonvolatile memory area is formed in said recording medium.

25 9. A digital camera for transmitting to an external storage device an image signal

of a subject taken, comprising:

a detector for detecting a relationship in magnitude between a vacant capacity of said external storage device and a size of the image signal;

5 a first transmitter for transmitting an extension request for the vacant capacity to said external storage device based on a result of detection by said detector; and

a second transmitter for transmitting the image signal to said external storage device after the vacant space has been extended in response to the extension request.

10. A digital camera according to claim 9, further comprising:

10 a prompter for prompting the vacant capacity to extend when the vacant capacity is lower than the size; and

an instructor for instructing an extension of the vacant capacity; wherein said first transmitter transmitting the extension request in response to an instruction by said instructor.

15 11. A digital camera according to claim 10, wherein the capacity of said external storage device is on sale on a predetermined-size basis and the instruction of said instructor is an instruction for purchasing a capacity of the predetermined size.

## ABSTRACT OF THE DISCLOSURE

A digital camera includes an interface connected with a memory card. To the memory card is recorded an image file including a compressed main-image data and compressed thumbnail image data of a subject taken. When the operator selects a transmit mode and performs predetermined key operation, the image file recorded on the memory card is transmitted to an Internet server via a communication circuit. After completing the transmission, the image files already transmitted are erased leaving the compressed thumbnail image data.

09695981-106600

FIG. 1

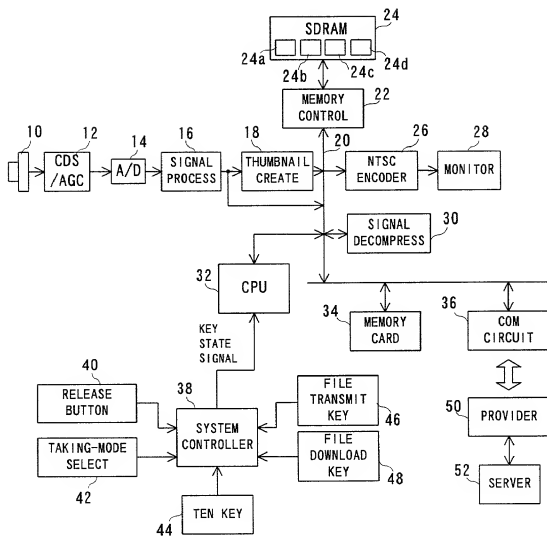


FIG. 2


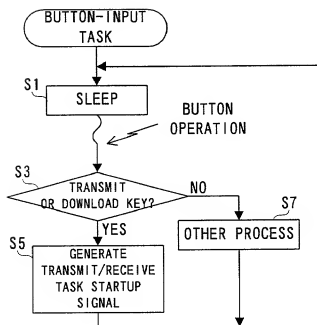






FIG. 4

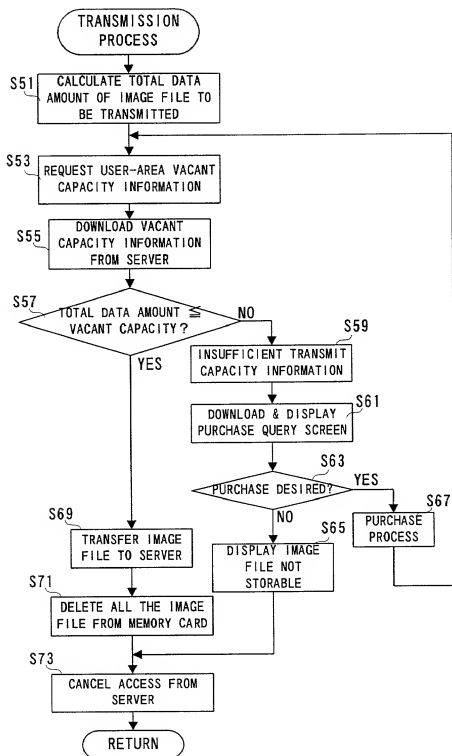

09595931.102600

FIG. 5


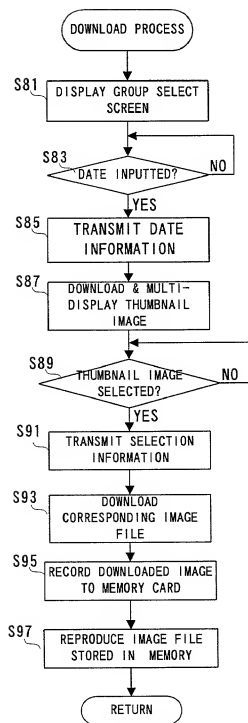


FIG. 6

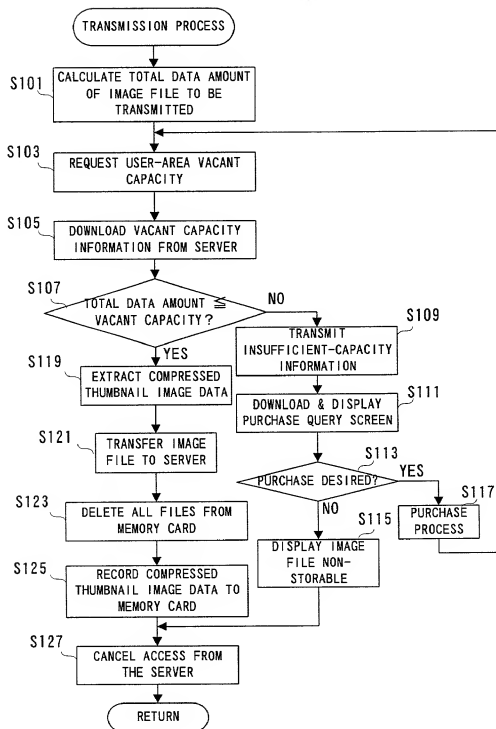

0665981.102600

FIG. 7



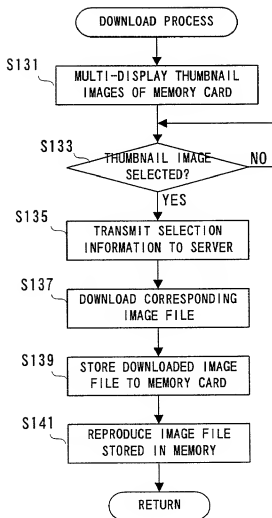


FIG. 8

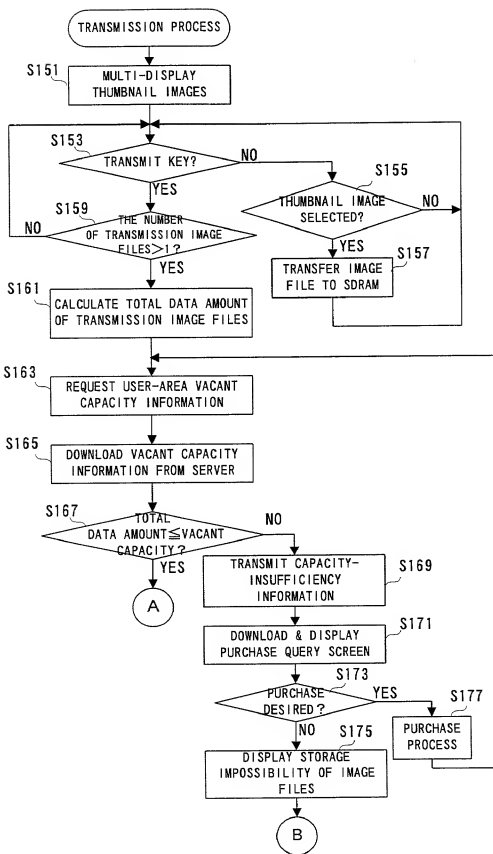


009201-18656960

FIG. 9

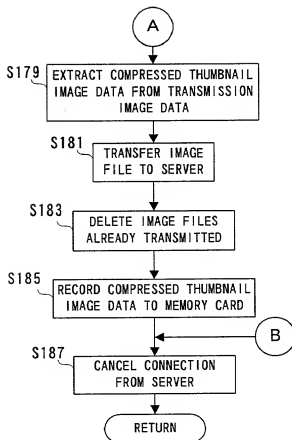

09695931-102500

FIG. 10

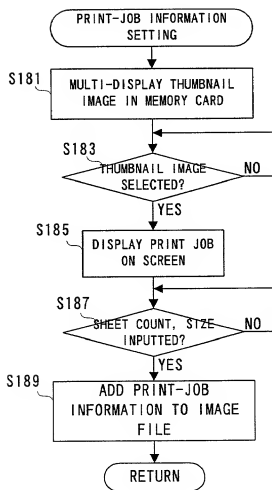

09695921.102500



FIG. 11

INPUT PASSWORD

\*\*\*\*\*

FIG. 12

SELECT MODE

①TRANSMIT MODE

②DOWNLOAD MODE

FIG. 13

PURCHASE OF ADDITIONAL  
AREA (+30MB) DESIRED

①YES    ②NO

FIG. 14

IMAGE FILE IS NOT ALLOWED  
TO STORE IN SERVER

FIG. 15

INPUT DATE OF DOWNLOAD DESIRED

\*\*/\*\*/\*\*

FIG. 16

INPUT PRINT-JOB INFORMATION

NUMBER \*\*\*SHEETS

SIZE \*\*\*

09695981-102600

# Declaration For U.S. Patent Application

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention **entitled**  
(Insert Title) DIGITAL CAMERA

the specification of which is attached hereto unless the following is checked:

☐ was filed on \_\_\_\_\_ as United States Application Number or PCT International  
Application Number \_\_\_\_\_ and was amended on \_\_\_\_\_  
(if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 (a) - (d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

(List prior foreign applications. See note A on back of this page)	<b>Patent Application</b>			<b>Priority Claimed</b>
	No. <u>11-307764</u>	<u>Japan</u>	<u>28 October 1999</u>	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
	(Number)	(Country)	(Day/Month/Year Filed)	
	No. <u>12-134876</u>	<u>Japan</u>	<u>8 May 2000</u>	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
	(Number)	(Country)	(Day/Month/Year Filed)	
	(Number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No
	(Number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No

(See note B on back of this page)

☐ See attached list for additional prior foreign applications

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below.

_____	_____
(Application Number)	(Filing Date)
_____	_____
(Application Number)	(Filing Date)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of the application:

(List Prior U.S. Applications)	_____	_____	_____
	(Application Serial Number)	(Filing Date)	(Status) (patented, pending, abandoned)
	_____	_____	_____
	(Application Serial Number)	(Filing Date)	(Status) (patented, pending, abandoned)

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

James E. Armstrong, III, Reg. No. 18,366; William F. Westerman, Reg. No. 29,988; Ken-Ichi Hattori, Reg. No. 32,861; Le-Nhung McLeland, Reg. No. 31,541; Ronald F. Naughton, Reg. No. 24,616; John R. Pegan, Reg. No. 18,069; William G. Kratz, Jr., Reg. No. 22,631; Albert Tockman, Reg. No. 19,722; Mel R. Quintos, Reg. No. 31,898; Donald W. Hanson, Reg. No. 27,133; Stephen G. Adrian, Reg. No. 32,878; William L. Brooks, Reg. No. 34,129; John F. Carney, Reg. No. 20,276; Edward F. Welsh, Reg. No. 22,455; Patrick D. Muir, Reg. No. 37,403; Gay A. Spahn, Reg. No. 34,978; and John P. Kong, Reg. No. 40,054.

Please direct all communications to the following address:

ARMSTRONG, WESTERMAN, HATTORI,  
McLELAND & NAUGHTON  
1725 K Street, N.W., Suite 1000  
Washington, D.C. 20006  
Telephone: (202) 659-2930 Fax: (202) 887-0357

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18 of the United States Code, § 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor (given name, family name) Kazuo ITO  
(See note  
C above) Inventor's Signature Kazuo Ito Date October 23, 2000  
Residence Habikino-shi, OSAKA, Japan Citizenship Japanese  
Post Office Address 2-7-15, Minamieganosho, Habikino-shi, OSAKA, Japan

Full name of second inventor (given name, family name) Yasuo NOZAKI  
Inventor's Signature Yasuo Nozaki Date October 23, 2000  
Residence Kobe-shi, HYOGO, Japan Citizenship Japanese  
Post Office Address 3-1-1007, Kusugaoka-cho, Nada-ku, Kobe-shi, HYOGO, Japan

Full name of third inventor (given name, family name) \_\_\_\_\_  
Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_  
Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
Post Office Address \_\_\_\_\_

Full name of fourth inventor (given name, family name) \_\_\_\_\_  
Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_  
Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
Post Office Address \_\_\_\_\_

Full name of fifth inventor (given name, family name) \_\_\_\_\_  
Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_  
Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
Post Office Address \_\_\_\_\_

Full name of sixth inventor (given name, family name) \_\_\_\_\_  
Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_  
Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
Post Office Address \_\_\_\_\_

Full name of seventh inventor (given name, family name) \_\_\_\_\_  
Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_  
Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
Post Office Address \_\_\_\_\_

Full name of eighth inventor (given name, family name) \_\_\_\_\_  
Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_  
Residence \_\_\_\_\_ Citizenship \_\_\_\_\_  
Post Office Address \_\_\_\_\_